

ChemValve[®]

**MODEL 790EB-150
HIGH PERFORMANCE
LINED PLUG VALVE**



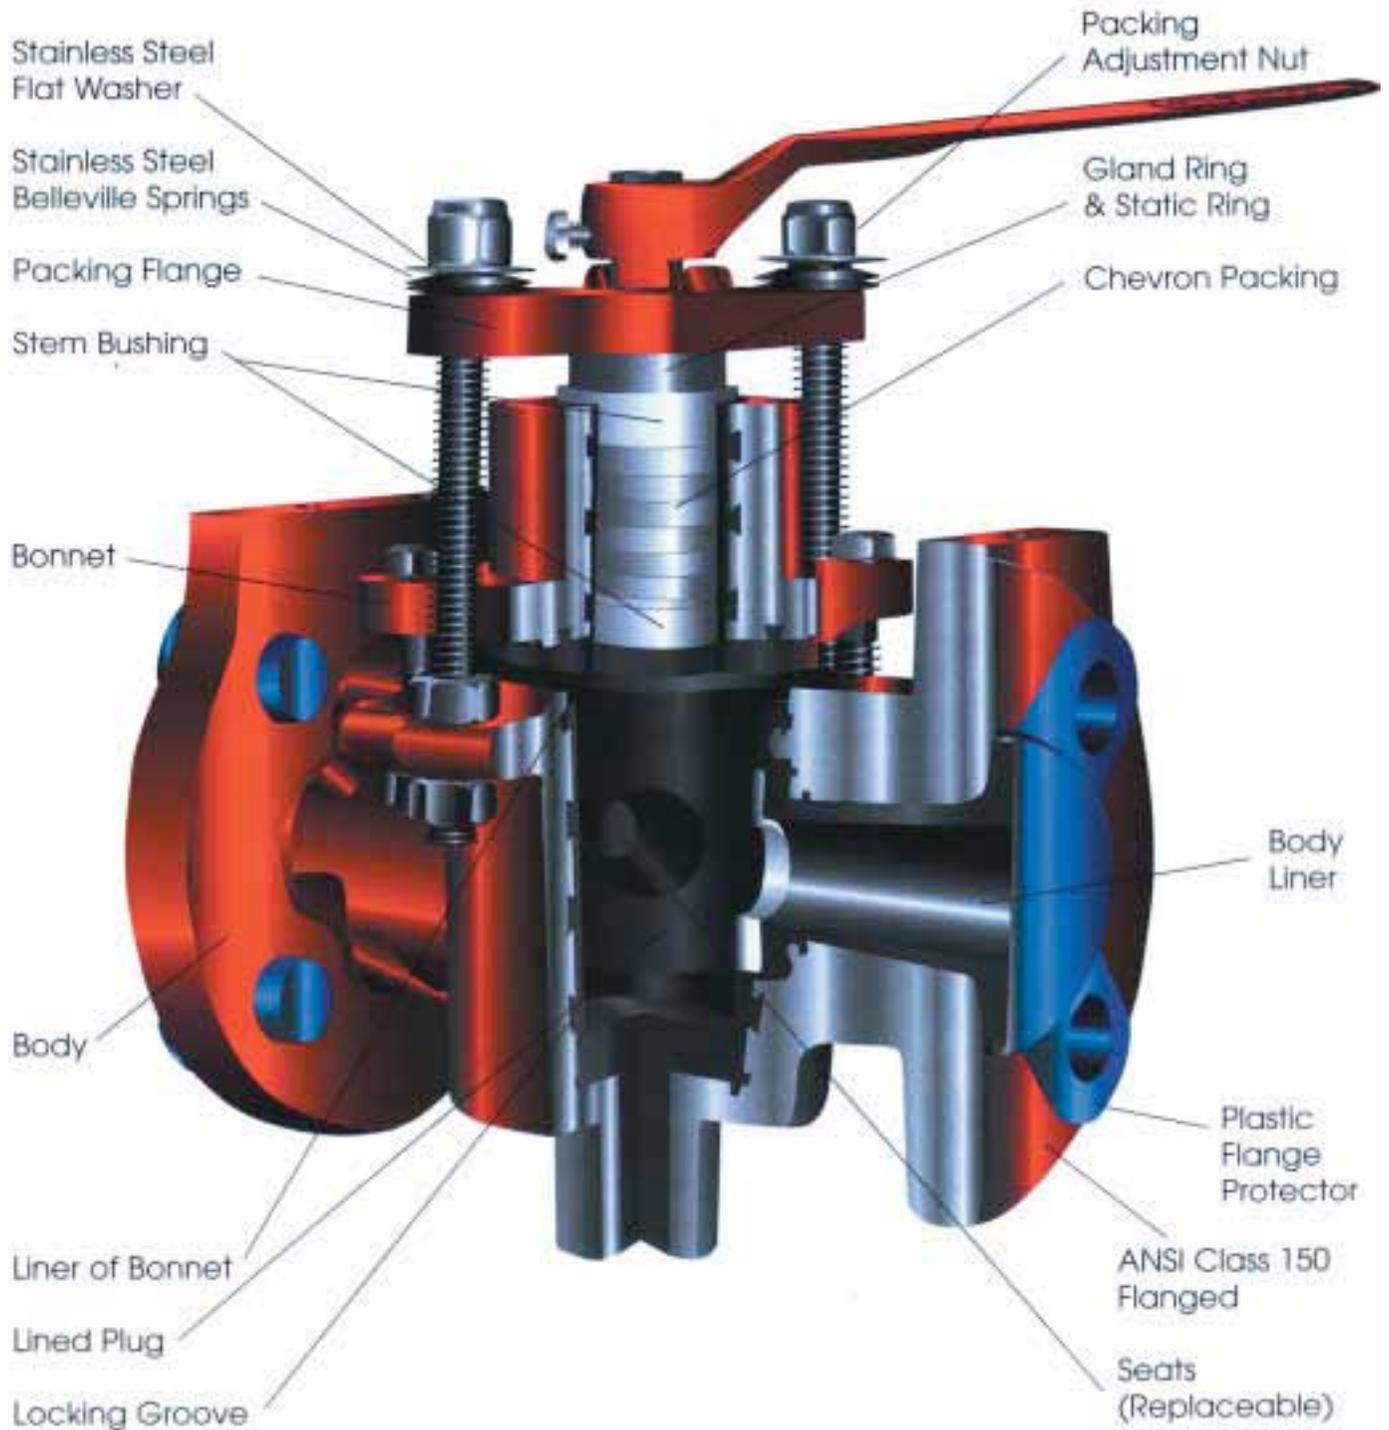

MODEL 790EB-150

HIGH PERFORMANCE LINED PLUG VALVE

FIRST PLASTIC LINED PLUG VALVE

WITH FIELD REPLACEABLE SEATS

- Available in sizes 1” through 8”
- Class 150 ANSI raised face flanged end connection
- Available in Polypropylene, PVDF-Kynar®, PFA, and GRPFA (Glass Reinforced PFA) liner materials
- Rated at 250 PSIG up to 100°F, and 150 PSIG at the temperature capability of the plastic liner
- Rated for full vacuum service
- Chevron TFM packing
- Replaceable seats
- Low turning torques
- Thicker plastic liners (0.125 inches minimum)
- Longer service life

ACTUATION AND INSTRUMENT VALVE ASSEMBLIES

| <u>MANUAL</u> | <u>PNEUMATIC</u> | <u>ELECTRIC</u> | <u>ACCESSORIES</u> |
|------------------|------------------|-----------------|----------------------|
| Handle | Piston | All Styles | Solenoid Valve |
| Square Nut | Rack & Pinion | | Positioner |
| “T” - Handle | Diaphragm | | Transducer |
| Extension Handle | Vane | | Limit Switches |
| Gear Operator | Spring Return | | Position Transmitter |
| Chain Wrench | | | Manual Override |
| Chain Wheel | | | |

THE MODEL 790EB-150 LINED PLUG VALVE IS INJECTION MOLDED

Injection molding is a process whereby plastic resin is heated to a melt temperature and injected under pressure into the interior of the Model 790EB-150 plug valve body, bonnet or onto the plug. This process creates a uniformly dense thickness of heavy plastic lining. Also, it is locked into the machined body grooves. The locked-in lining is an excellent feature for vacuum service applications. Other plug valve designs using PTFE as a liner cannot use the injection molding process because PTFE does not melt. During this process, the PTFE can thin and experience stress concentrations, because a PTFE tube must be forced into shape by pressure and temperature, PTFE liners may not be of uniform thickness nor will they be locked in for vacuum service. Thus, injection molding is the superior method of lining valves with plastic.

CHOICE OF LINERS

Model 790EB-150 Plug Valve liner selection is dependent upon the application

MODEL 790EB-150 plug valves can be supplied with Polypropylene, PVDF-Kynar®, PFA or GRPFA. These are all melt processible resins which are injection molded into the valve body.

Liner selection should be based on the corrosion resistance of the plastic resin to the flowing media at service temperature and pressure. Please consult a corrosion chart for compatibility. Remember, there is no need to use a PFA lined valve when Polypropylene will perform just as well.

PPL

POLYPROPYLENE

Polypropylene is a thermoplastic resin exhibiting an excellent balance of corrosion resistance and economy. When injection molded into a Model 790EB-150 plug valve, it provides an excellent low cost product for many applications, such as HCl applications and in the water and waste water treatment industry. The suitability of polypropylene is highly dependent on service temperature. Polypropylene is especially good in ambient temperature applications. This liner has been tested in 37% HCl and approved. The maximum temperature rating of the 790EB-150 Polypropylene lined plug valve is 225 degrees F.

PVDF

KYNAR® (Poly-vinylidene fluoride)

PVDF is a strong hard fluorocarbon resin which is thermally stable, non-toxic and has excellent chemical resistance. PVDF is especially well suited to weak corrosives and slurry service applications found in bleach plants of pulp and paper mills. PVDF is the material of choice for chlorine and other halogen containing chemicals. The suitability of PVDF in a given corrosive service is highly dependent on temperature. In some cases, PVDF can be substituted for a PFA lining. In abrasive applications, PVDF will work better than PFA, due to its resistance to erosion, provided it is chemically compatible with the service. The maximum temperature rating of the 790EB-150 PVDF lined plug valve is 275 degrees F.

PFA

(Perfluoroalkoxy)

PFA is a higher temperature resin with the same outstanding chemical inertness as PTFE. Due to its chemical composition, PFA retains a high amount of mechanical strength at elevated temperatures. The maximum temperature rating of the Model 790EB-150 PFA lined plug valve is 400 degrees F.


GRPFA

Glass-Reinforced PFA

Glass reinforced PFA is a liner material which combines the corrosion resistance of PFA at elevated temperatures with the abrasion resistance quality of PVDF. GRPFA is unsurpassed in high temperature slurry applications where virgin PFA or PTFE lined valves cannot withstand erosion. The maximum temperature rating the the Model 790EB-150 GRPFA lined plug valve is 400 degrees F.


MODEL 790EB-150 HIGH PERFORMANCE LINED PLUG VALVE

GLOBE VALVE STYLE CHEVRON PACKING

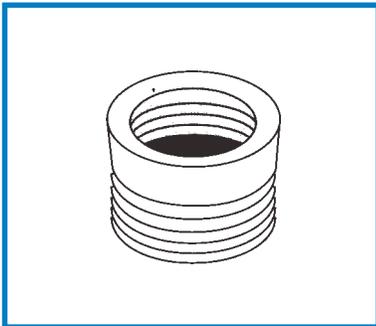


The ChemValve® Model 790EB-150 high performance lined plug valve has adjustable chevron TFM packing like a globe valve. The six ring set is much more substantial than the thin diaphragms used in other lined plug valve designs. If process pressure leaks into one of the packing rings, it will mechanically spread the ring sealing off the leak. This means there is little chance of either corrosive stem leakage onto the bonnet of the valve or fugitive emissions to the atmosphere.

BALL VALVE STYLE REPLACEABLE SEATS

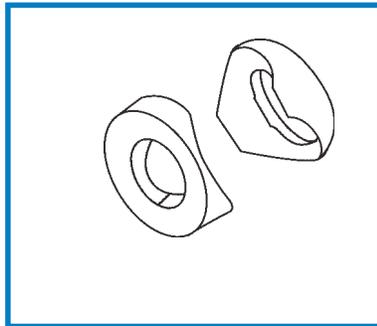

The ChemValve® Model 790EB-150 high performance lined plug valve has replaceable seats like a ball valve, giving it many advantages over other lined plug valve designs. When the seats wear down from multiple cycles, they are easily replaced without removing the Model 790EB-150 plug valve from the pipe line. Other lined plug valves, however, must be discarded and a new valve installed. Because our seats take the wear of the plug, the Model 790EB-150 liner lasts longer against the effects of erosion, pressure and temperature. The replaceable seats in the ChemValve® Model 790EB-150 give lower operating torques equating to additional benefits including ease of turning and downsizing of actuators.

PLUG VALVE

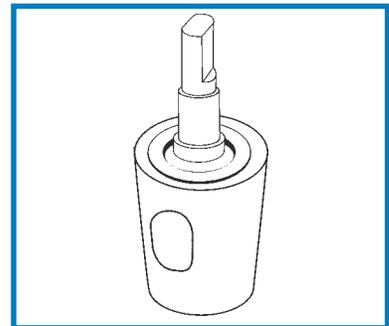

The plug valve is one of the oldest valve designs known to man, but it is still an excellent choice for corrosive and/or erosive applications due to its adjustability. Unlike a fully lined ball valve design which has no facility to stop line leakage, the Model 790EB-150 high performance lined plug valve can be adjusted to stop a leak past the seats while the valve is in service. Furthermore, the adjustment is simple enough to be performed by a plant operator armed with pliers, instead of requiring an experienced valve mechanic with several tools. The packing flange extends perpendicular to the pipeline allowing easy adjustment especially if the valve is actuated. All of these features convert directly into cost savings for the user.

ENGINEERING DATA

TECHINCAL DESCRIPTION

Pressure Class: ANSI CL 150
(DIN Std. Optional)

Size Range: 1" to 8" (25mm-200mm)

End Connection: Raised face flanged

Liner Material: PPL, PVDF, PFA, GRPFA

Liner Thickness: Minimum .125"
Rated for Full Vacuum

External Protection: Water Based Acrylic Urethane
Other Coatings Available

| MODEL 790EB-150 BILL OF MATERIALS | |
|-----------------------------------|---------------|
| PART | MATERIAL |
| Body | Ductile Iron* |
| Bonnet | Ductile Iron* |
| Packing Flange | Steel** |
| Plug | Ductile Iron* |
| Seats | PTFE |
| Packing | TFM |
| Gland Ring | 304 SS |
| Static Ring | 302 SS |
| Botlling | 316 SS |
| Handle | Steel |


| Size | CV VALUE | BREAK TORQUE (IN./LBS.) |
|------|----------|-------------------------|
| 1" | 20 | 300 |
| 1.5" | 53 | 420 |
| 2" | 133 | 420 |
| 3" | 247 | 900 |
| 4" | 420 | 1320 |
| 6" | 713 | 2400 |
| 8" | 1420 | 4010 |

* All Cast Ductile Iron is ASTM-A395

* All Cast Steel is ASTM-A216-WCB


NOTE: Above Torques for PTFE Seats

PRESSURE - TEMPERATURE CURVES

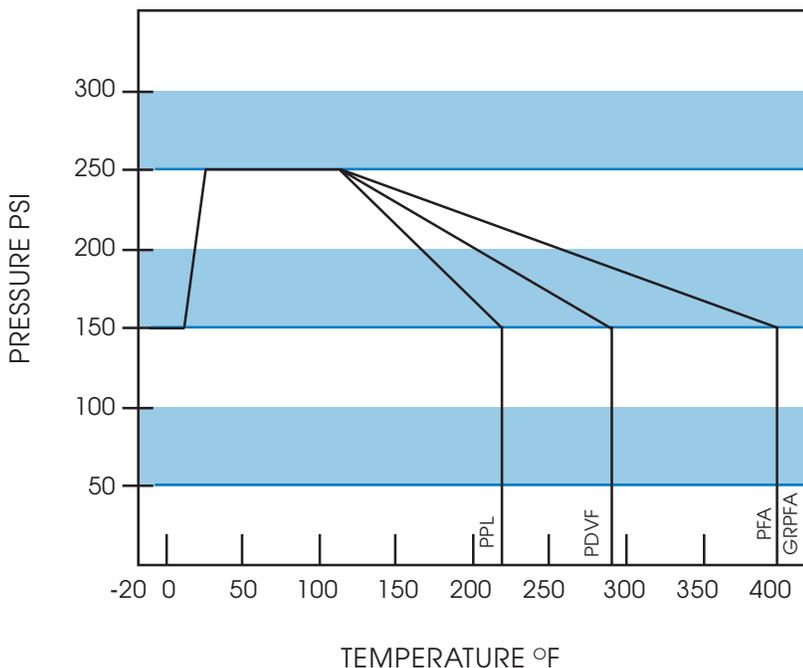

| MAX SERVICE TEMPERATURE | |
|-------------------------|------------------|
| PPL | 225°F (107°C) |
| PVDF | 275°F (135°C) |
| PFA | 400°F (204°C) |
| GRPFA | 400°F (204°C) |

OUTLINE DIMENSIONS OF MODEL 790EB-150 LINED PLUG VALVE

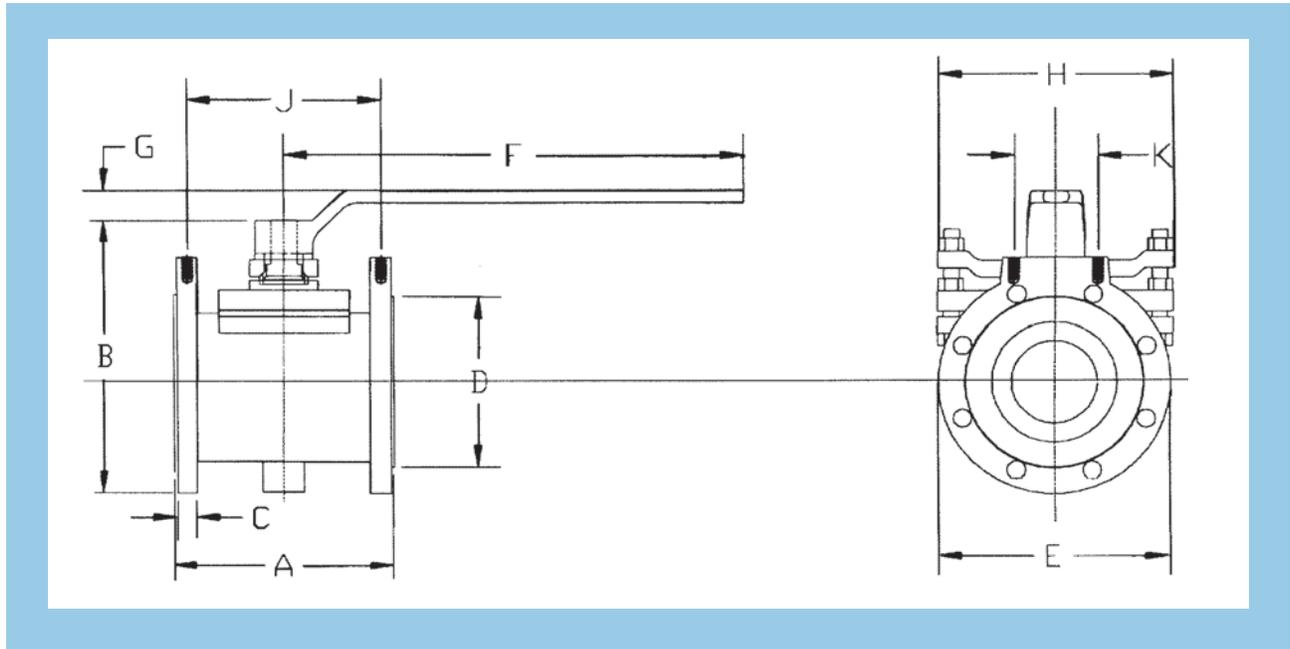

* + Tolerance $\pm 1/16''$

** Tolerance $\pm 0.010''$

| Nominal Valve Size | A* | B* | C* | D* | E* | F* | G* | H* | Bolt Hole Diam. | Diam. Bolt Circle | Approx. Valve Weight | Mounting Pad | | | 4 Tapped Holes | |
|--------------------|--------|--------|-------|--------|--------|--------|-------|--------|-----------------|-------------------|----------------------|--------------|-------|------------|----------------|--------------|
| | | | | | | | | | | | | J** | K** | Hole Diam. | Thread | Thread Depth |
| 1" | 5.00" | 7.13" | 0.44" | 2.00" | 4.25" | 10.0" | 1.00" | 5.63" | 5/8" | 3 1/8" | 13# | 4.20" | 1.75" | 5/16" | 18UNC | 7/8" |
| 1.5" | 6.50" | 7.75" | 0.56" | 2.88" | 5.00" | 10.0" | 1.00" | 7.50" | 5/8" | 3 7/8" | 18# | 5.63" | 1.75" | 5/16" | 18UNC | 1" |
| 2" | 7.00" | 8.50" | 0.63" | 3.63" | 6.00" | 10.0" | 1.00" | 7.50" | 3/4" | 4 3/4" | 26# | 6.00" | 2.25" | 5/16" | 18UNC | 1" |
| 3" | 8.00" | 10.50" | 1.75" | 5.00" | 7.50" | 16.00" | 0.75" | 9.00" | 3/4" | 6.00" | 47# | 6.80" | 3.50" | 3/8" | 16UNC | 1 1/8" |
| 4" | 9.00" | 11.50" | 0.94" | 6.13" | 9.00" | 16.00" | 0.75" | 9.00" | 3/4" | 7.50" | 79# | 7.75" | 4.00" | 1/2" | 13UNC | 1 1/8" |
| 6" | 10.50" | 14.75" | 1.00" | 8.38" | 11.00" | 22.00" | 1.50" | 11.30" | 7/8" | 9.5" | 129# | 9.20" | 4.00" | 1/2" | 13UNC | 1 1/8" |
| 8" | 11.50" | 20.53" | 1.19" | 10.62" | 13.5" | N/A | N/A | 14.31" | 7/8" | 11.75" | 200# | 9.97" | 7.00" | 1/2" | 13UNC | 1 1/8" |

ChemValve®

website: www.chemvalve.com

27850 Commercial Park Road
Tomball, TX 77375

PH: (281) 357-0101
(800) 879-3720
FAX: (281) 255-2261

email: ChemValve@worldnet.att.net